

Double Row Cylindrical Roller Bearings

Prefix:


NN: Double row cylindrical roller bearing

Suffixes:

M: Brass cage, roller riding

SP: Special precision grade

ASK: Outer ring has lubricating groove and lubricating holes, taper 1:12

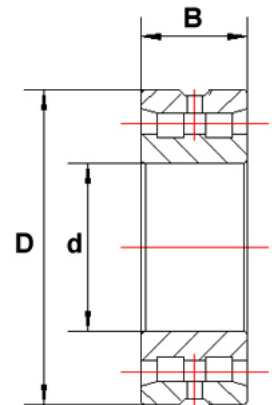

Code	Dimensions (mm)			r_s min	Mass (kg)	Load rating (kN)		Attainable speed (min ⁻¹)	
	d	D	B			Cr	Cor	Grease	Oil
NN3006ASK.M.SP	30	55	19	1	0.191	29	34	16000	19000
NN3007ASK.M.SP	35	62	20	1	0.249	35.5	44	14000	17000
NN3008ASK.M.SP	40	68	21	1	0.303	45	58.5	12000	15000
NN3009ASK.M.SP	45	75	23	1	0.393	54	72	11000	14000
NN3010ASK.M.SP	50	80	23	1	0.426	57	80	10000	13000
NN3011ASK.M.SP	55	90	26	1.1	0.63	72	100	9000	11000
NN30126ASK.M.SP	60	95	26	1.1	0.674	75	110	8500	10000
NN3013ASK.M.SP	65	100	26	1.1	0.715	76.5	116	8000	9500
NN3014ASK.M.SP	70	110	30	1.1	1.04	98	150	7000	8500
NN3015ASK.M.SP	75	115	30	1.1	1.09	100	156	6700	8000
NN3016ASK.M.SP	80	125	34	1.1	1.51	120	186	6300	7500
NN3017ASK.M.SP	85	130	34	1.1	1.58	125	200	6000	7000
NN3018ASK.M.SP	90	140	37	1.5	2.05	140	224	5600	6700
NN3019ASK.M.SP	95	145	37	1.5	2.14	143	236	5300	6300
NN3020ASK.M.SP	100	150	37	1.5	2.23	146	245	5300	6300
NN3021ASK.M.SP	105	160	41	2	2.84	190	310	4800	5600
NN3022ASK.M.SP	110	170	45	2	3.61	220	360	4500	5300
NN3024ASK.M.SP	120	180	46	2	3.94	232	390	4300	5000
NN3026ASK.M.SP	130	200	52	2	5.79	290	500	3800	4500
NN3028ASK.M.SP	140	210	53	2	6.22	300	520	3600	4300
NN3030ASK.M.SP	150	225	56	2.1	7.58	335	585	3400	4000